



FLUSH / SURFACE MOUNT 4" TIME 2.3" DATE / TEXT RED, GREEN, YELLOW, BLUE  
**GLASS FACE - EASY TO CLEAN**

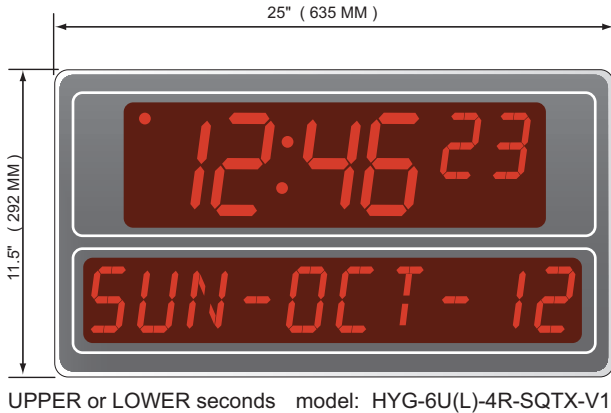

UPPER or LOWER seconds model: HYG-6U(L)-4R-SQTX-V1



Short cord with flat plug shown  
Optional:  
Long cord or Screw terminal  
for power connection



UPPER or LOWER seconds model: HYG-6U(L)-4R-SQTX-V2

Multifunction  
Remote Control  
Included



**SPECIFICATIONS:**

Supp. Voltage: 115V or 208-240V, 50/60Hz  
24 or 12V AC/DC  
Power: 18VA average  
Oper. Temp: 0C to +50C (32F to 122F)  
(military range optional)  
Humidity: 95% RH max. non cond.  
Visibility: Up to 80Ft. (25m)



**6 DIGIT TIME DISPLAY modes:**

- MODE 1: \*HH:MM SS ( 12 hour format with am/pm dot )
- MODE 2: HH:MM SS ( 24 hour format )
- MODE 3: HH:MM PM ( 12 hour format with am/pm text )
- MODE 4: HH:MM SS ( 24 hour Military format )
- MODE 5: HH:MM SS ( UP/DOWN Timer modes )
- MODE 6: MM:SS hh ( UP/DOWN Timer modes with 1/100 sec )
- MODE 7: d 267 07 ( JULIAN DAY with Year )

**DATE/TEXT DISPLAY modes:**

- MODE 1: FRI-OCT-12
- MODE 2: OCT-12-FRI
- MODE 3: 12-OCT-FRI
- MODE 4: FRI-12-OCT
- MODE 5: 12-OCT-2007
- MODE 6: OCT-12-2007
- MODE 7: 2007-12-OCT
- MODE 8: HH-MM-SS ( timer or counter )
- MODE 9: TIMER MM-SS ( timer )
- MODE 10: DDD-HH-MM.SS ( timer or counter )
- MODE 11: IN 25.3 C (or: 77.5 F)
- MODE 12: OUT 16.4 C (or: 61.5 F)
- MODE 13: TEMP. 25.3 C (or: 77.5 F)
- MODE 14: DAY 245 ( Julian day of the year )
- MODE 15: HH-MM-SS AM/PM ( Real Time Clock )
- MODE 16: TIME ZONE / TEXT DISPLAY

NOTE: Display with **UPPER** or **LOWER** seconds available

**OPTIONS:**

1. INTERNAL POWER SUPPLY FOR 115V or 220V , 50/60Hz
2. 12V and 24V DC or AC SUPPLY OPTION
3. MASTER SYNC WITH RS-232/485 COMPUTER INTERFACE / TWISTED PAIR ( option # 725 and # 725232 )
4. MASTER SYNC WITH SERIAL COMMUNICATION OVER THE POWER LINE WIRING ( option # 724RS )
5. MASTER SYNC OVER POWER LINE CARRIER (HIGH AND LOW VOLTAGE) ( option # 724LW and # 724HW )
6. MASTER SYNC 2 AND 3 WIRE, 6 TO 30 VOLT MINUTE IMPULSE ( option # 726B )
7. MASTER SYNC ASCII TIME CODE FORMAT 0, 1, 2, 3, 4 ON RS-232/485 ( option # 726 )
8. MASTER SYNC COMPATIBLE WITH SIMPLEX BCD FORMAT ( option # 726BCD )
9. MASTER SYNC FROM GPS, NTP SERVERS OR PC SERIAL PORT ( option # 725, # 725GPS or # 725NTP, )

