

General Specifications

2.3", 6 Digits with smaller seconds or same size seconds in Flush mount enclosure

SELENA
LED Digital Clocks

ALL CLOCKS INCLUDE REMOTE CONTROL

model series: HYMSF-6S-2.3 and HYMSF-6(U)L-2.3

Super Bright LEDs: **RED, GREEN, YELLOW or BLUE** - **2.3 INCH High, 6 Digits**
with **SAME SIZE or SMALLER SECONDS** (Upper or Lower)

STANDARD FEATURES:

- * Infra Red hand held REMOTE CONTROL for all functions
- * 12 or 24 Hour and Military Display Format (user selectable via remote)
- * Stand - Alone operation for Home or Office
- * Backup:
Self-recharging backup - NO BATTERY NEEDED
- * Day/Date/Month/Year Alternating display selection
- * Fully Adjustable Brightness
(Manual via remote control)
- * Julian Day display
- * Auto Leap-Year correction
- * Day Light Savings correction (N. America)
- * Timers:
Wake-Up Alarm Timer with soft beeper control
Stop-Watch function up to 1/100 sec resolution
Up/Down Presettable Timer and Counter with Alarm
(up to 99hrs:59min:59sec or 999999 counts)
Cycling timer, Up and Down
- * On-Board Alarms: Internal Alarm buzzer
- * NON-GLARE lens
- * NON-MULTIPLEXING - Camera friendly
- * Variety of enclosure colors.

Flush Mount, Metal, Straight Enclosure



Multifunction
Remote Control
Included

SPECIFICATIONS:

Supply Voltage:	115V or 208-240V, 50/60Hz 24 or 12V AC/DC
Power:	6VA average
Operating Temperature:	0C to +50C (32F to 122F) (military range optional)
Humidity:	95% RH max. non cond.
Dimensions Face w/flange:	15.25" x 5.25" x 2.5" (38.7cm x 13.4cm x 6.3cm)
Visibility:	Up to 80Ft. (25m)

Optional FEATURES:




- * Direct Replacement for existing MASTER - SLAVE SYSTEM CLOCKS
(replaces round, mechanical or electronic)
- * Multiple Master-Slave correction modes:
Master-Slave Power Line Carrier sync (Simplex)
Master-Slave 2 Wire, RS485 Twisted Pair Sync/Communication
Master-Slave wireless communication on power line wiring
Master-Slave wireless RF, radio communication
Master-Slave network ethernet communication
Master-Slave BCD digital, ASCII Time Code
RS232, USB and RS485 serial communication (PC port as the Master)
Master-Slave 2 and 3 Wire, 24V Minute Impulse Sync
- * Multi-Zone synchronized Master-Slave system
- * Temperature Monitoring and Control:
Multi-Event Programmable Thermostat (up to 32 events/day)
Heating - Cooling Auto Change-Over
Inside and Outside Thermometer function
Min/Max Temperature Memory
Temperature Alarm and Relay outputs (up to 2 x Form C, 10Amp/250V)
- * Backup:
10 Year Lithium battery option
- * Atomic Clock radio option
(WWVB60, DCF77, HBG75, MSF60, OHTAKADOYA40, HAGANE60)
- * Atomic Clock GPS option
- * Automatic Brightness with Auto-dimming option
- * Timers:
Multi-Event Programmable Timer (up to 32 events/day)
Stop-Watch function up to 1/100 sec resolution
External Start/Stop/Reset switch inputs
Auto-reloading time period measurement
Continuous time count on power failure
- * On-Board Alarm Relays for timers and counters:
(up to 2 x Form C, 10Amp/250V) For external load, siren or horn.

Flush Mount 2.3" Metal Enclosure

Enclosure series 732FL and 732FLS

6-digit model with same size seconds or smaller seconds
standard colors: white, black and stainless steel




Enclosure series 732FL

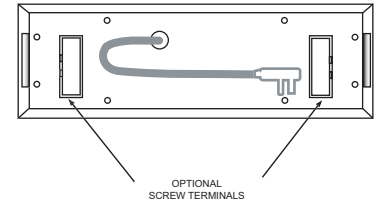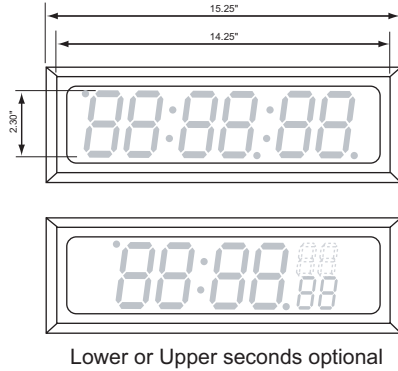

Short cord with flat plug shown
Optional:
1) Long cord or Screw terminal for power connection
2) Wall plug-in transformer for power

6-digit model with smaller seconds or 4-digit models
standard colors: white, black and stainless steel

Enclosure series 732FLS

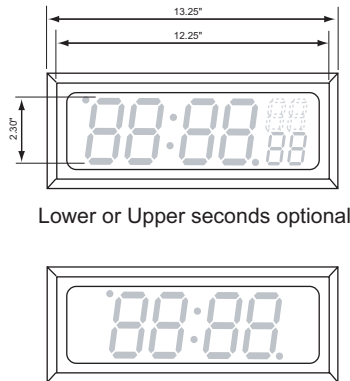

Short cord with flat plug shown
Optional:
1) Long cord or Screw terminal for power connection
2) Wall plug-in transformer for power

