


NOTE: CONNECT WIRING BEFORE PROCEEDING WITH MECHANICAL ASSEMBLY

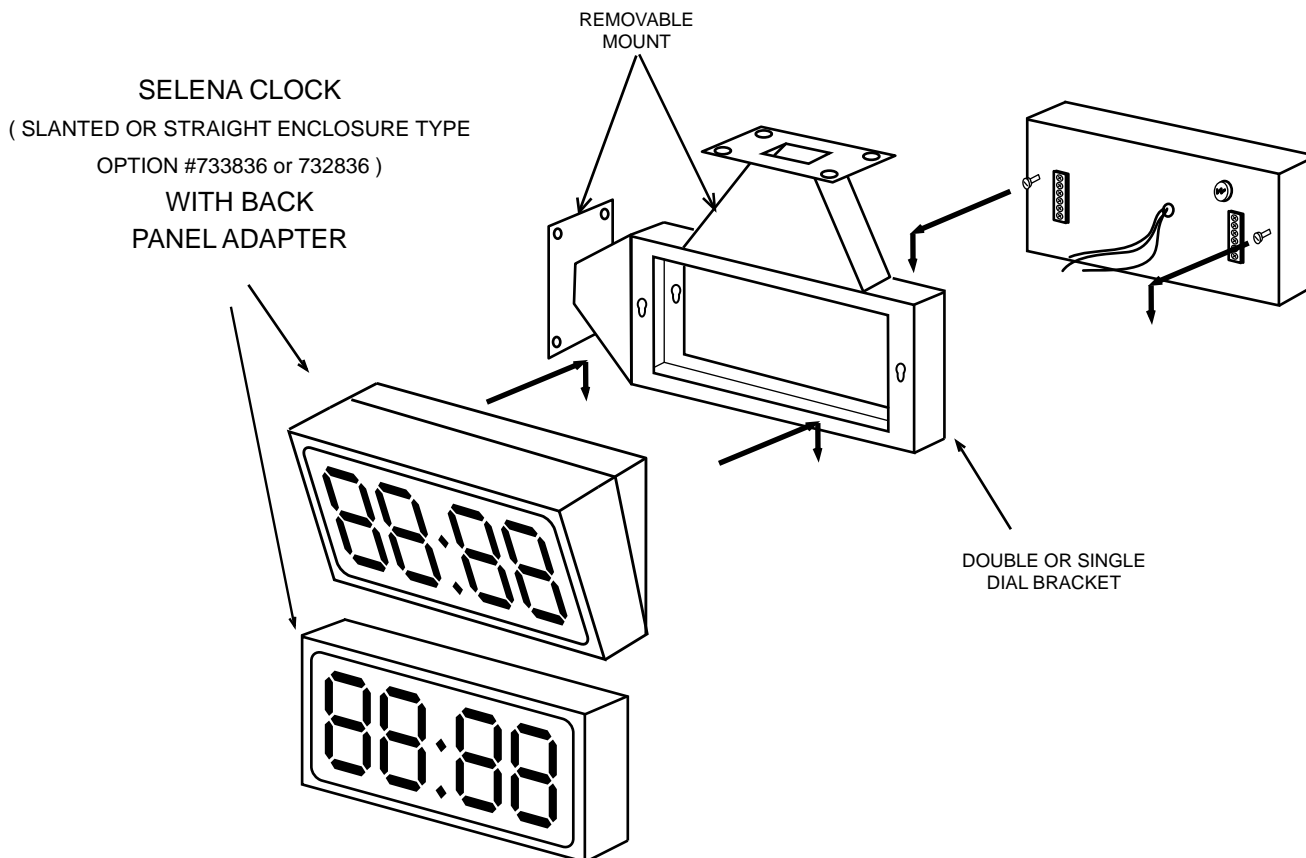

#### INSTALLATION:

1. Install the Wall or Ceiling support and connect necessary wires for supply and synch.
2. Slide SELENA clock vertically onto mounting bracket and push it down to secure clock on mounting tabs.
3. If necessary tighten the bolts that slide into keyholes.
4. Reinstall top plate of the bracket.
5. Using Remote Control, enable required Sync mode.  
(mode may be changed at any time via remote control without disconnecting the power)

#### NOTE:

- A) For Power line Carrier Sync SELENA with option #724 needed
- B) For Twisted Pair (RS-485) Sync SELENA with option #725 needed
- C) For 2-wire ASCII/BCD Sync SELENA with option #726 needed

ALL SYNC OPTIONS MAY BE INSTALLED IN THE SAME SELENA CLOCK, BUT ONLY ONE MAY BE ENABLED (VIA REMOTE CONTROL) FOR PROPER OPERATION.